

# AC/DC INDUSTRIAL POWER SUPPLY-100W



Power Supplies

513xx SERIES

## MAIN FEATURES:



- 100W Small Compact Size
- Built-in Active PFC Function:>0.95
- Regulated Output Range: 5.0VDC–48VDC
- Input Range: 85VAC – 305VAC/47 – 63Hz or 120VDC – 430VDC
- Very Low Standby Power Consumption  $\leq 0.2W$
- High Energetic Efficiency: Meets the requirements of Energy Star and the EC Code of Conduct
- Safety : Meets IEC/EN61558-2-16, IEC/EN60335-1, IEC/EN62368-1, UL62368-1, CSA C22.2NO.62368-1-14, CE, UKCA
- EMC: Conducted and Radiated Emission conform to EN55032, FCC Part 15, CLASS B, EN/IEC61000-3-2 CLASS C EN61000-3-3
- Immunity conforms to EN61000-4-2,EN/IEC61000-4-3,E61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11

## DATA SHEET



Part No.	Power Rating Watts	Output Voltage (VDC)	Rated Output Current (A)	Output Voltage Range-ADJ(Vdc)	Ambient Temp. (°C)	Efficiency Typical	Input Range
51301	75	5.0	15.0	4.75 ~ 5.75	-25°C ~ +70°C	>85%@230VAC	85 ~ 305VAC (120-430VDC)
51302	90	9.0	10.0	8.55 ~ 10.30	-25°C ~ +70°C	>86%@230VAC	
51303	100(102max.)	12	8.4 (8.5max.)	11.40 ~ 13.80	-25°C ~ +70°C	>86%@230VAC	
51304	100(105max.)	15	6.7 (7.0max.)	14.25 ~ 18.50	-25°C ~ +70°C	>86%@230VAC	
51305	100(105max.)	18	5.6 (5.8max.)	17.50 ~ 20.50	-25°C ~ +70°C	>88%@230VAC	
51306	100(108max.)	24	4.2 (4.5max.)	22.80 ~ 28.80	-25°C ~ +70°C	>88%@230VAC	
51307	100(110max.)	36	2.8(3.05max.)	34.20 ~ 39.60	-25°C ~ +70°C	>89%@230VAC	
51308	100(110max.)	48	2.1 (2.3max.)	43.20 ~ 52.80	-25°C ~ +70°C	>89%@230VAC	

NOTE : Other output voltage are available upon request.

Please refer to MYRRA's website and catalogue for MYRRA SMPS application notes.

The information contained in this document is subject to change without notice.

[www.myrra.com](http://www.myrra.com)  
[www.myrra-powersupplies.com](http://www.myrra-powersupplies.com)  
 contact us : [contact@myrra.com](mailto:contact@myrra.com)

# AC/DC INDUSTRIAL POWER SUPPLY-100W



## 513xx SERIES

## Power Supplies

Model : 100 Watt		Specifications
AC Input Characteristics	Rated Input Voltage	100~277 VAC or 140VDC-390VDC
	Input Voltage Range	85~305VAC or 120VDC-430VDC
	AC Input Frequency Range	47Hz~63Hz
	Rated AC Input Frequency	50/60Hz
	Input Current	2.0A Max.
	Input Inrush Current	60A Max @277VAC input, cold start, full load
	Standby Power	0.2W Max (Meets the Requirements of Energy Star and the EC Code Of Conduct)
	Power Factor	>0.95@230V input at full load
	Leakage Current	<0.75mA/305VAC
DC Output Characteristics	Output Voltage Accuracy	±2% (Output Voltage ADJ Range See table)
	Output Voltage Line Regulation	± 0.5%
	Output Voltage Load Regulation	± 1%
	Ripple & Noise	Max 180mVp-p@ Rated AC input, at nominal line (The measuring will be terminated with a 47µF AL E-Cap and a 0.1µF Ceramic-Cap. An scilloscope set at 20MHz bandwidth)
	Dynamic Response	The output voltage shall not exceed ± 10% rated output voltage @ 50% ~ 90 % Load change, 1A/µS, 1KHz 50% duty cycle
	Hold Up Time	5mS min@ 100 VAC~277VAC, DC output with full load
	Turn On Delay	3S max @ 85VAC~305VAC input and DC output with full load
	Rise Time	50ms max @ 85VAC~305VAC input and DC output with full load
	Overshoot	The output voltage shall not exceed +10% rated output voltage @ Power on and 85VAC~305VAC input, and DC with full load
	Undershoot	The output voltage shall not exceed -10% rated output voltage @ Power off and 85VAC~305VAC input and DC output with full load

The information contained in this document is subject to change without notice.

Please refer to MYRRA's website and catalogue for MYRRA SMPS application notes.

[www.myrra.com](http://www.myrra.com)

[www.myrra-powersupplies.com](http://www.myrra-powersupplies.com)

contact us : [contact@myrra.com](mailto:contact@myrra.com)

# AC/DC INDUSTRIAL POWER SUPPLY-100W



## 513xx SERIES

## Power Supplies

	Efficiency	See table (Meets the requirements of Energy Star and the EC Code of Conduct)
Protection Characteristics	Over Current Protection	The power supply shall automatic protection. The power supply shall auto-recovery normal operations after the deformation is removed. No excessive heat, odour, no safety hazard
	Output Short Circuit Protection	The power supply shall withstand a continuous output short without damage in 24 hours; The short may be applied before power on, or after power on; The power supply shall resume normal operation after the short is removed, no excessive heat, odour no safety hazard.
	Over temperature protection	The power supply is built thermal protection function and can be shut down(hiccup mode) when NTC thermistor's body temperature reach approx.110°C@ power supply operating ambient temperature approx.+80°C ±10°C @ at the DC output with full load. The power supply shall auto-recovery normal operation,it is subject to the shut-down is long enough to allow the thermal detection is down to auto reset.
	Operation Temperature	-25°C~+70°C (Refer to« DERATING GRAPH »)
Environmental	Operation Humidity	10~90% RH (No Condensing) @ full load
	Storage Temperature	-40°C~ +85°C (Recommended +5°C~ +35°C)
	Storage Humidity	5%~95% (Recommended <75%RH)
	Cooling Method	Ordinary or thermostat
	Dielectric Strength	Input to Output : 3750VAC 5mA, 3 sec. Input to GND: 2000VAC 10mA, 3 sec. Output to GND: 1250VAC 10mA, 3 sec
Safety & EMC Requirement	Insulation Resistance	100MΩ max @500Vdc
	Radiation	Meets EN55032, FCC part 15 Class B. under 3dB margin
	Conduction	Meets EN55032, FCC part 15 Class B. under 3dB margin
	Harmonic Current Distance	Meets EN/IEC61000-3-2:2019, Class C
	Voltage Fluctuation and Flicker	Meets EN61000-3-3:2013
	Electrostatic Discharge	Meets EN61000-4-2 : 2009, Contact Discharge ± 6KV, Air Discharges ± 8KV
	RF Field Strength Susceptibility	Meets EN/IEC61000-4-3:2019, 10V/m

# AC/DC INDUSTRIAL POWER SUPPLY-100W




<b>Safety &amp; EMC Requirements</b>	Electrical Fast Transient	Meets EN61000-4-4:2012, $\pm$ 4KV
	Lightning Surge	Meets EN61000-4-5:2014, $\pm$ 6KV common mode, $\pm$ 4KV diff.mode
	Conducted Susceptibility	Meets EN61000-4-6:2014, 10Vr.m.s
	Power Frequency Magnetic Field Susceptibility Test	Meeting EN61000-4-8:2010, 30A/m
	Voltage Dips and interruptions	Meets EN61000-4-11:2004, 0%,70%
	Safety Standards	Meets all requirements of : UL62368-1, CSA C22.2 NO.62368-1-14 IEC/EC62368-1 IEC/EN60335-1 IEC/EN61558-2-16 CE,UKCA
<b>Reliability Requirement</b>	MTBF	>200K Hours @230VAC input at 50deg.C; >450K Hours @230VAC input at 25deg.C Calculated in accordance with MIL-HDBK-217-F2
	Burn-in-Test	The unit shall be burned in 2~5hours under 230VAC input and DC with full load at and ambient temperature of 30~45 degrees C
<b>Mechanical</b>	Physical size	The units dimension is : (L)134*(W)97.5*(H)30mm ( $\pm$ 1mm) (see appearance drawing)
	Net Weight	Approximately 260 grams per product unit
<b>Guarantee</b>	This product is in accordance with the European RoHS & REACH directives	

# AC/DC INDUSTRIAL POWER SUPPLY-100W





Power Supplies

## SCHEMATIC

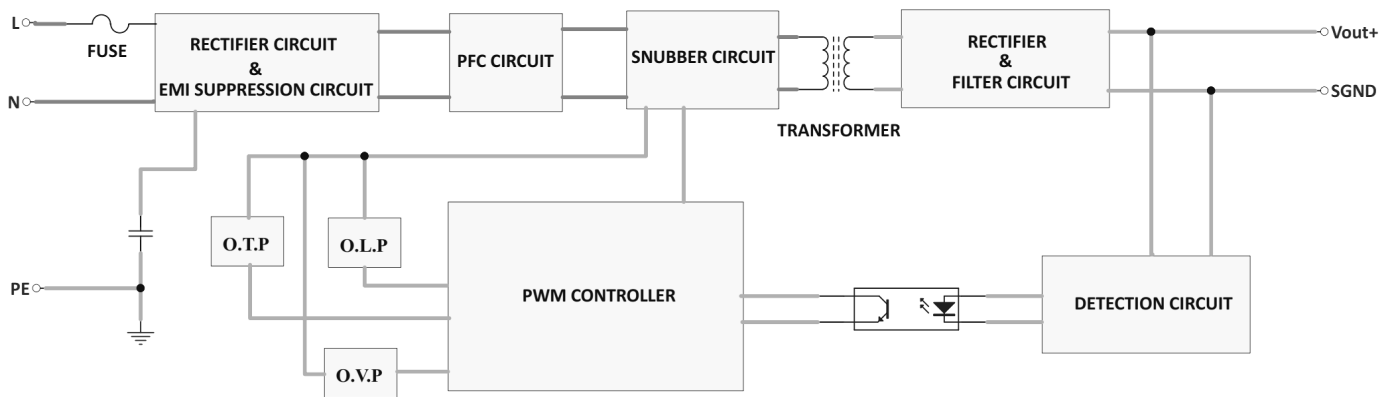

## DERATING GRAPH

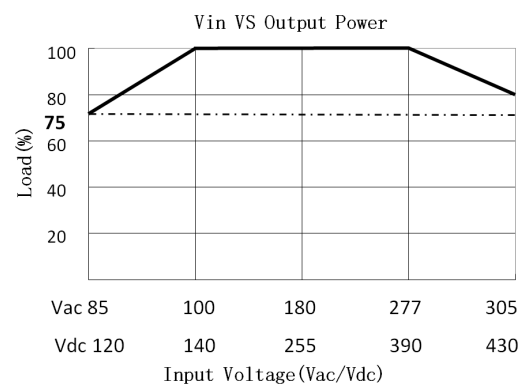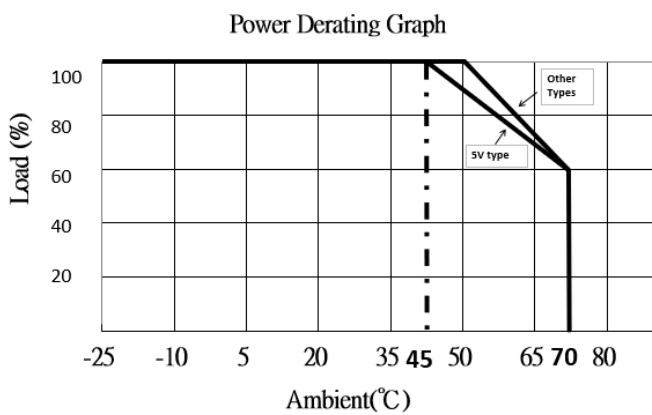

Please refer to MYRRA's website and catalogue for MYRRA SMPS application notes.

The information contained in this document is subject to change without notice.


[www.myrra.com](http://www.myrra.com)  
[www.myrra-powersupplies.com](http://www.myrra-powersupplies.com)  
 contact us : [contact@myrra.com](mailto:contact@myrra.com)

# AC/DC INDUSTRIAL POWER SUPPLY-100W



Power Supplies

## DIMENSIONS

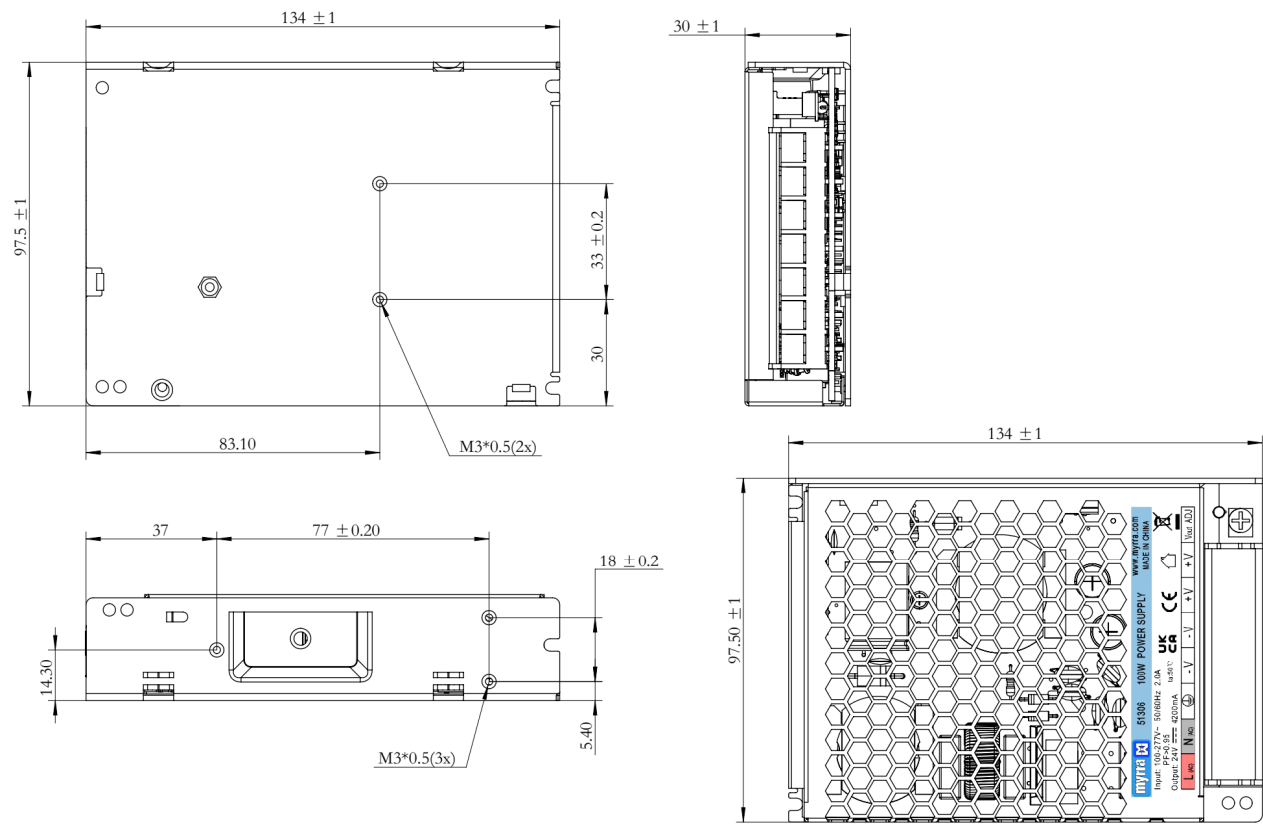

Please refer to MYRRA's website and catalogue for MYRRA SMPS application notes.

The information contained in this document is subject to change without notice.

[www.myrra.com](http://www.myrra.com)

[www.myrra-powersupplies.com](http://www.myrra-powersupplies.com)

contact us : [contact@myrra.com](mailto:contact@myrra.com)